



Printed PET acoustic panel

✓ **Easy and quick installation**

Mounted with a Z bar system

✓ **Light and elegant design**

Clean and minimalist look with refined finishes

✓ **Eco-friendly**

A sustainable acoustic solution made from PET.

✓ **Low maintenance**

Dust-repellent surface, no complex upkeep required.

✓ **Finishes**



WHITE



BLACK



GREY

Technical Specifications

Composition

- Thermobonded nonwoven made of 100% PES staple fibres
- Fibre content from recycled PET bottles: approx. 60%
- Minimal sorption moisture approx. 1.02% according to DIN 52620
- Resistant to fungi (DIN EN ISO 846:2019)
- Resistant to vermin and mites
- Skin-friendly
- Recyclable
- Allergen-free
- Certified Oeko-Tex Standard 100
- No chemical additives



Application

Wall and ceiling

Surface mass

2400 g/m²


Fire classification

B-s1, d0 (EN 13501-1)

Sound absorption coefficient

$\alpha_w = 0.95$

Measured sound
absorption coefficient
according to DIN EN ISO
354:2003-12

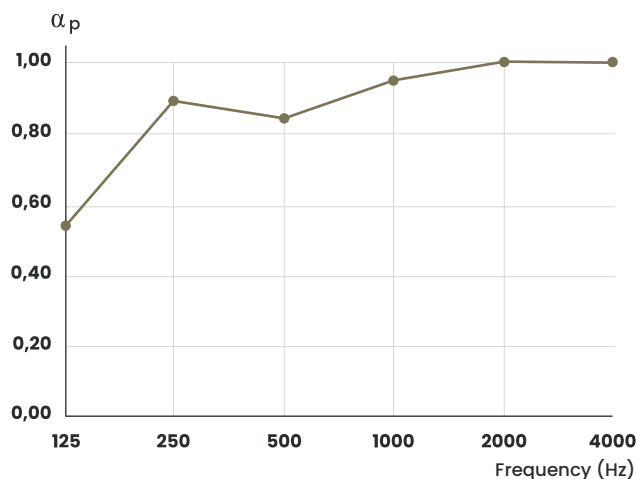

Frequency (Hz)	125	250	500	1000	2000	4000
α_p	0.55	0.90	0.85	0.95	1.00	1.00