



Acoustic Grooved PET Panel

✓ **Easy and quick installation**

To glue or fix on support

✓ **Modern aesthetics**

Design with visible 27 mm slats

✓ **Eco-friendly**

Made from recycled PET fibers, recyclable, and free of harmful substances

✓ **Dimensions**

Panels : 2700 x 520 x 21 mm

✓ **Coloris**



BEIGE



LIGHT GREY



BLACK



DARK GREY

Technical Specifications

Composition

- 100% polyester fiber (non-irritant PET)
- 50% recycled materials
- 27 mm slats fixed with glue and screws (every 13 mm)
- Low VOC emission

Application

Wall and ceiling


Surface mass

Base : 1800 g/m² | Slats : 2600 g/m²

Fire rating

B-s1, d0 (EN 13501-1)

Acoustic absorption coefficient measured according to DIN EN ISO 354:2003-12

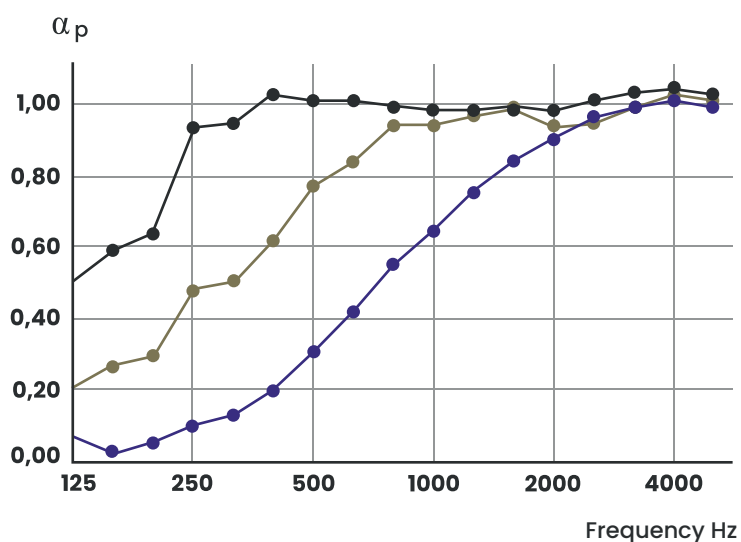

Installation method	α_w	Class
Direct gluing	0.45	D
Battens with 50 mm spacing	0.85	B
Battens with 50 mm spacing + insulation	1.00	A



