


SYSTEM COMPOSITION

1. Perforated tray 160/500 th. 0,75 mm
2. Low density glasswool th. 160 mm
3. Particle board CTBH P5 th. 22 mm
4. Acoustic panel PHONOTECH DK80 Double Foam

Absorption

$\alpha_w = 0,95$

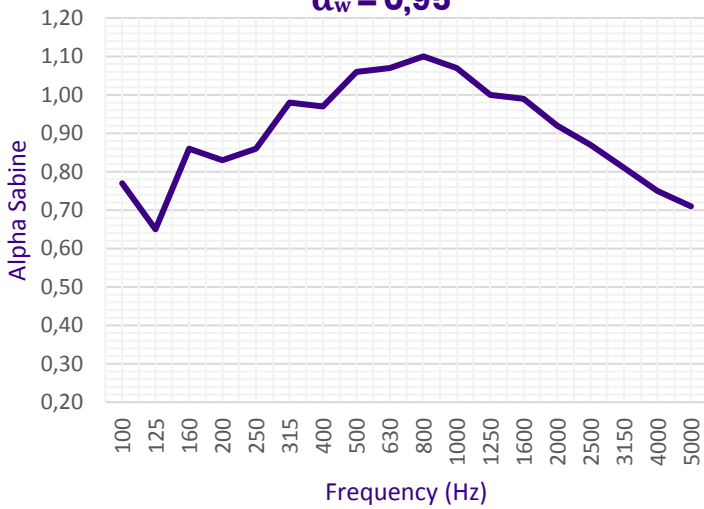


α_p per octave band (Hz)

Frequency (Hz)	125	250	500	1000	2000	4000
α_p	0,75	0,90	1,00	1,00	0,95	0,75

Insulation

$R_w(C; C_{tr}) = 61(-5; -13) \text{ dB}$

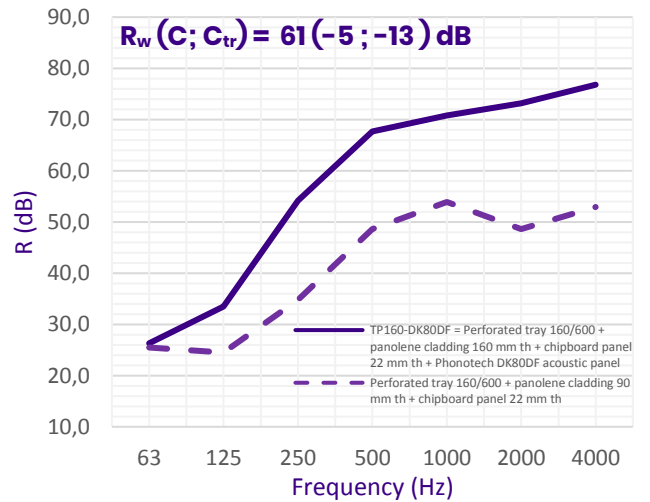

R (dB) per octave band (Hz)

Frequency (Hz)	63	125	250	500	1000	2000	4000
R (dB)	33,5	33,5	54,2	67,7	70,8	73,2	76,8

System	Sound reduction			α_w	Thermal R. (m ² .K/W)	U (W/m ² .K)	Weight (kg/m ²)	Thickness (mm)	PV
	R _w (dB)	R _A (dB)	R _{A,tr} (dB)						
TP160-DK80DF	61	56	48	0,95	7,74	0,13	50,53	304	CEDIA(03/18)

ADDRESS

Zoning Industriel les Plénesses
Rue des Waides 8, 4890 Thimister
Belgium

WEBSITE

www.phonotech.com

E-MAIL

info@phonotech.com

PHONE

+32 (0) 87 33 33 30

FAX

+32 (0) 87 78 52 30