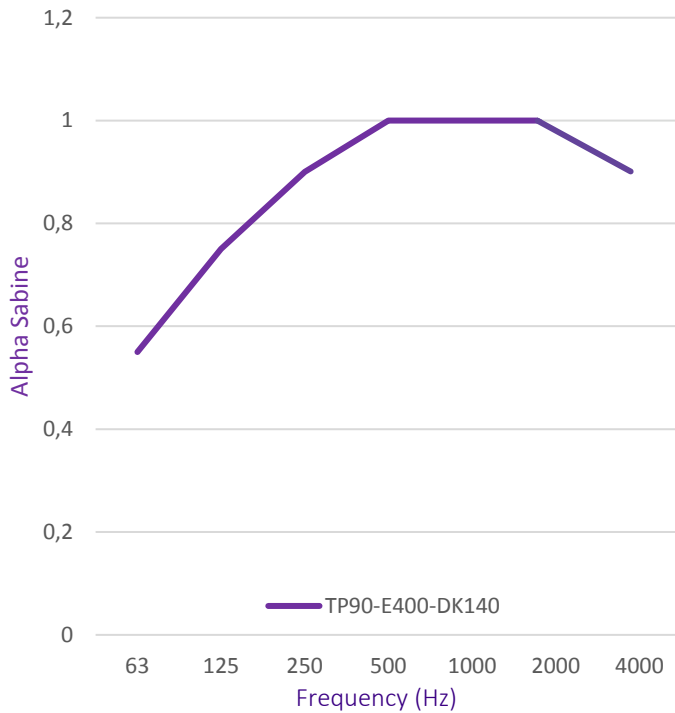


SYSTEM COMPOSITION


- | | |
|---|--------------------------------------|
| 1. Perforated tray 90/500 0,75 mm | 6. Cleat spacer 400 mm |
| 2. Glasswool 90 mm 15 kg/m ³ | 7. Sigma purlins 140mm |
| 3. Polyethylene vapor barrier | 8. Corrugated steel sheet 75/10 |
| 4. Felt insulation bardage 100mm 15 kg/m ³ | 9. Particle board CTBH P5 th. 22 mm |
| 5. Felt insulation bardage 80mm 15 kg/m ³ | 10. Acoustic panel Phonotech DK140 * |

* : System tested without sealing (sealing of your choice: this material provides you an additional acoustic performance to this complex)

Absorption

 $\alpha_w = 1,00$


Insulation

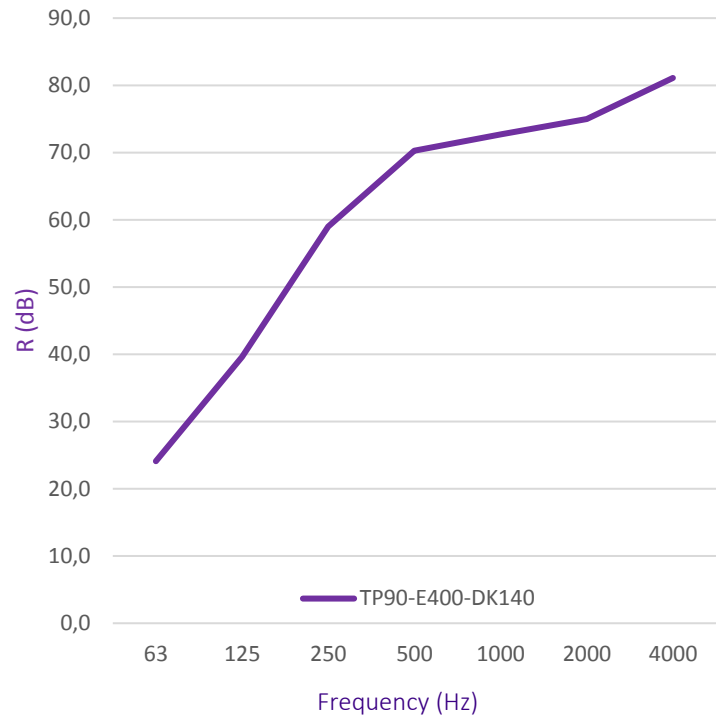 $R_w (C; C_{tr}) = 68 (-4 ; -13) \text{ dB}$


α_p per frequency (Hz)

Frequency (Hz)	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
α_p per frequency third	0,42	0,83	0,47	0,79	0,66	0,76	0,98	0,82	0,96	1,18	1,16	1,10	1,06	1,02	1,00	1,02	1,02	1,00	0,95	0,91	0,86
Frequency (Hz)	63			125			250			500			1000			2000			4000		
α_p per frequency	0,55			0,75			0,90			1,00			1,00			1,00			0,90		

R (dB) per frequency (Hz)

Frequency (Hz)	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
R (dB) per frequency third	23,4	25,6	23,5	35,3	45,4	50,7	56,7	59,9	62,1	67,4	72,1	74,2	74,6	72,5	71,6	73,1	75,5	77,5	79,8	82,7	81,3
Frequency (Hz)	63			125			250			500			1000			2000			4000		
R (dB) per frequency	24,1			39,6			59,0			70,3			72,7			75,0			81,1		

System	Sound insulation			α_w	Thermal R (m ² .K/W)	U (W/m ² .K)	Weight (kg/m ²)	Thickness (mm)	Test Report
	R _w (dB)	R _A (dB)	R _{A,tr} (dB)						
TP90-E400-DK140	68	62	55	1,00	11,29	0,09	63,40	640	CEDIA (06/2020)

ADDRESS

 Zoning Industriel les Plénesses
 Rue des Waides 8, 4890 Thimister
 Belgium

WEBSITE
www.phonotech.com
E-MAIL
info@phonotech.com
PHONE

+32 (0) 87 33 33 30

FAX

+32 (0) 87 78 52 30

© 2020. All Right reserved.