


SYSTEM COMPOSITION

- | | |
|---|------------------------------------|
| 1. Perforated tray 90/500 0,75 mm | 7. Sigma purlins 140mm |
| 2. Glasswool 90 mm 15 kg/m ³ | 8. Corrugated steel sheet 75/10 |
| 3. Polyethylene vapor barrier | 9. Particle board CTBH P5 22 mm |
| 4. Felt insulation bardage 100mm 15 kg/m ³ | 10. Acoustic panel Phonotech DK140 |
| 5. Felt insulation bardage 80mm 15 kg/m ³ | 11. Geotextile |
| 6. Cleat spacer 260mm | 12. PVC membrane 15 G |


Absorption

$\alpha_w = 1,00$

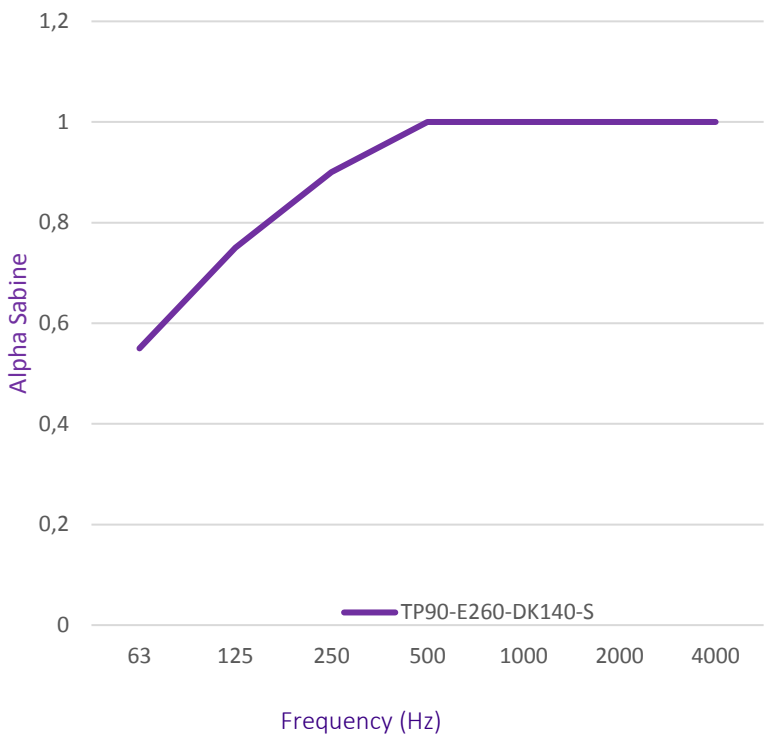

Insulation

$R_w(C; C_{tr}) = 67(-7; -16)$ dB

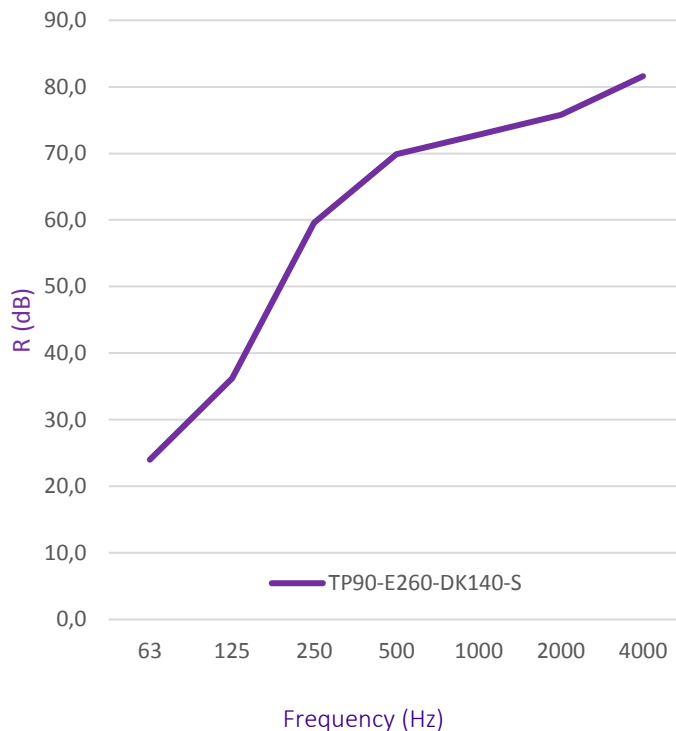

α_p per frequency (Hz)

Frequency (Hz)	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
α_p per frequency third	0,39	0,68	0,55	0,74	0,70	0,81	0,88	0,78	0,92	1,09	1,11	1,07	1,08	1,07	1,02	1,03	1,02	1,01	0,96	0,92	0,85
Frequency (Hz)	63			125			250			500			1000			2000			4000		
α_p per frequency	0,55			0,75			0,85			1,00			1,00			1,00			1,00		

R (dB) per frequency (Hz)

Frequency (Hz)	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
R (dB) per frequency third	21,9	27,9	24,1	31,9	41,9	51,2	57,7	60,1	62,0	66,7	72,1	74,9	74,5	71,7	72,6	74,0	76,2	78,4	80,4	83,1	81,6
Frequency (Hz)	63			125			250			500			1000			2000			4000		
R (dB) per frequency	24,0			36,2			59,6			69,9			72,8			75,8			81,6		

System	Sound insulation			α_w	Weight (kg/m ²)	Thickness (mm)	Test Report
	R _w (dB)	R _A (dB)	R _{A,tr} (dB)				
TP90-E260-DK140-S	67	60	51	1,00	67,60	503	CEDIA (06/2020)

ADDRESS

Zoning Industriel les Plénesses
Rue des Waides 8, 4890 Thimister
Belgium

WEBSITE

www.phonotech.com

E-MAIL

info@phonotech.com

PHONE

+32 (0) 87 33 33 30

FAX

+32 (0) 87 78 52 30

© 2020. All Right reserved.